

ADAPTIX™ ASJ-RMMSR-150


Technical Features

Compatible with Rohm MSR 150 Vice

Compatible Vice	Description	Model Size	Tip Step Height	Stud Profile	Weight	Part Number
Rohm MSR 150	ADAPTIX™ Only	150mm (6")	6mm	Round	14.33kg (31.6lbs)	ASJ-RMMSR-150-N-HST-RO-06
Rohm MSR 150	ADAPTIX™ + Rohm MSR 150 Vice Bundle	150mm (6")	6mm	Round	34.34kg (75.7lbs)	ASJ-RMMSR-150-V3-HST-RO-06

Materials

Housing	AISI 4140 Alloy Steel
Fingers	AISI 4140 Alloy Steel
Tips	AISI 4140 Alloy Steel
Studs	A2 Tool Steel
Operating Conditions	Machine Fluid / Coolant; Metallic Chips; Air Blast

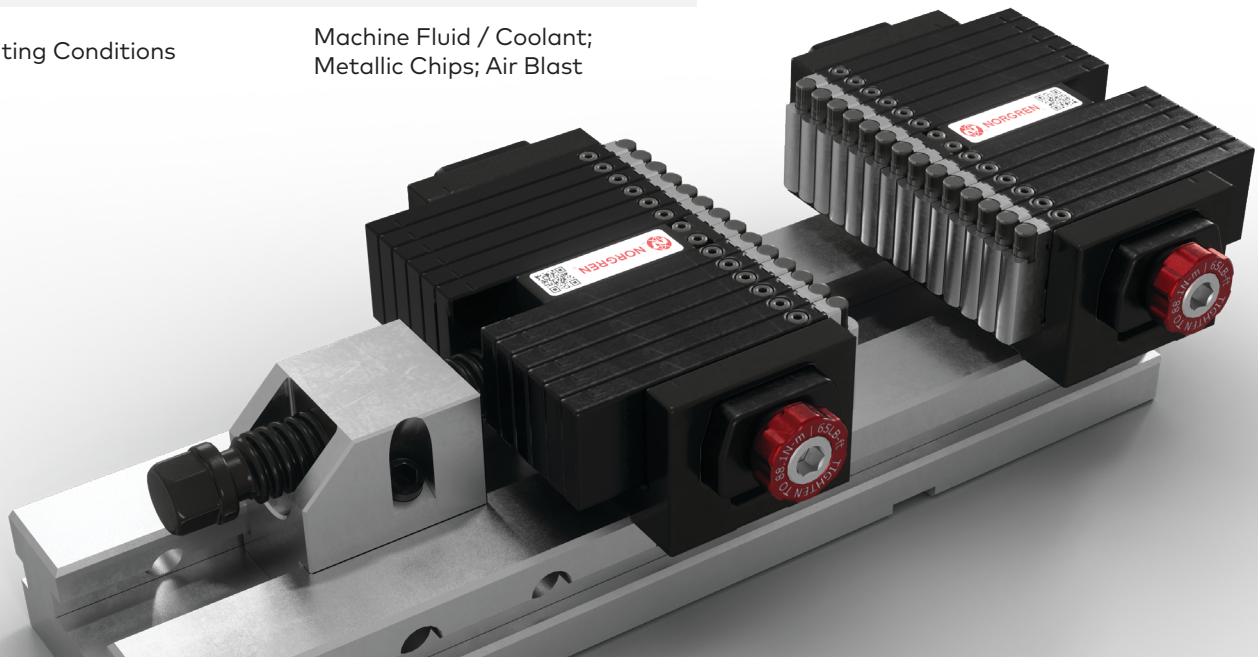

Repeatability:
25 micron
(0.001")






Clamping Force:
31kN
(7000 lbs.)




Locking Bolt Torque:
88N·m
(65lbf·ft)

Note: The overall repeatability will depend on the specification of the vice. Please check manufacturers details.

ADAPTIX™ Key Specifications

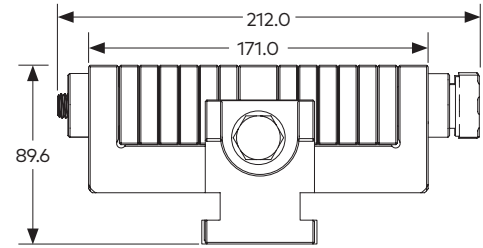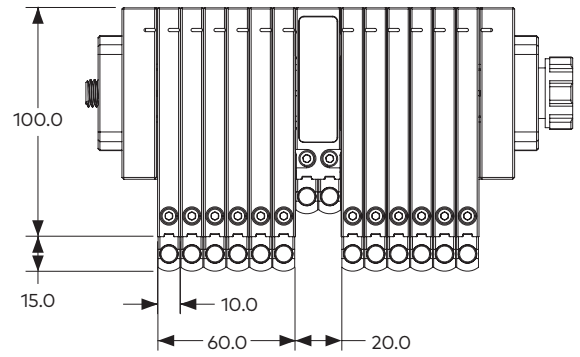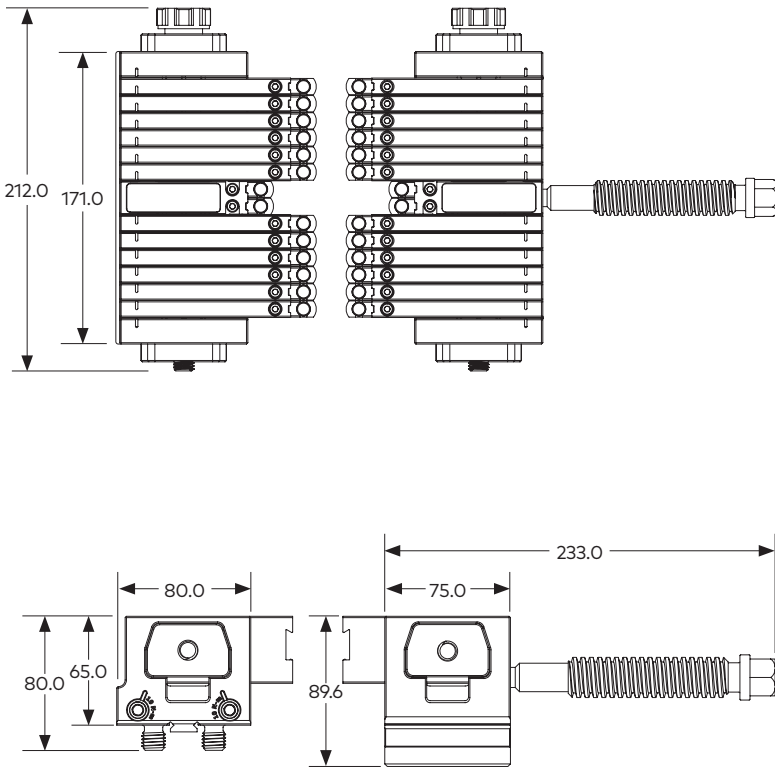

Free Housing

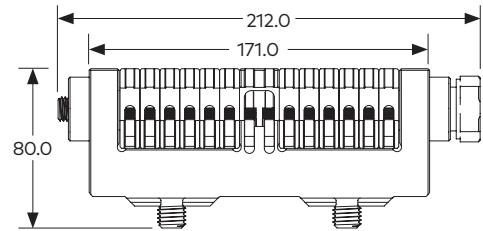

Fixed Housing

All dimensions in millimeters

ADAPTIX™ Accessories & Spares

Stud Multi-Packs

Material	Profile	Quantity	Part Number
Hard Steel	Round	30	ASJ-HST-RO-30
Hard Steel	Free Rotating	30	ASJ-HST-FS-30
Hard Steel	Serrated	30	ASJ-HST-ST-30

Spare Stud - Contains 1 x Stud

Material	Profile	Quantity	Part Number
Hard Steel	Round	1	ASJ-HST-RO
Hard Steel	Free Rotating	1	ASJ-HST-FS
Hard Steel	Serrated	1	ASJ-HST-ST

Tip Multi-Packs

Step Height	Quantity	Part Number
3mm	30	ASJ-FNGRTP-03-30
6mm	30	ASJ-FNGRTP-06-30
10mm	30	ASJ-FNGRTP-10-30

Spare Tip - Contains 1 x Tip

Step Height	Quantity	Part Number
3mm	1	ASJ-FNGRTP-03
6mm	1	ASJ-FNGRTP-06
10mm	1	ASJ-FNGRTP-10



Norgren operates four global centers of technical excellence and a sales and service network in 50 countries, as well as manufacturing capability in Brazil, China, Czech Republic, Germany, India, Mexico, UK and the USA.

For information on all Norgren companies visit www.norgren.com

Supported by distributors worldwide.



For more information scan QR code
or visit norgrenworkholding.com